


Drawing No.	Rev.	Page
MBLS - A61	A	1/3

产品规格书


1. 规格

型号		MBLS-DC1030V□K-□		MBLS-DC1080V□K-□	
额定电压		DC 10-30V		DC 10-80V	
工作电压范围		额定电压 ±5%			
额定电流	最大值	13.5V	28V	13.5V	80V
		R: 1.1A B: 1.4A	R:0.51A B: 0.62A	R: 1.1A B: 1.4A	R: 0.2A B: 0.24A
额定功率	最大值	13.5V	28V	13.5V	80V
		R: 14.85W B: 17.55W	R: 14.28W B: 17.36W	R: 14.85W B: 8.9W	R: 16W B: 19.2W
亮灯颜色		R: 红色 B: 蓝色			
工作环境温度		-40℃ ~ +65℃			
接口		D: DT04-2P			
		J: 500mm 线缆			
安装方式		支架安装			
防护等级		IP67/IP69K			
符合标准		ECE R10/RoHS 10/Reach			

2. 型号

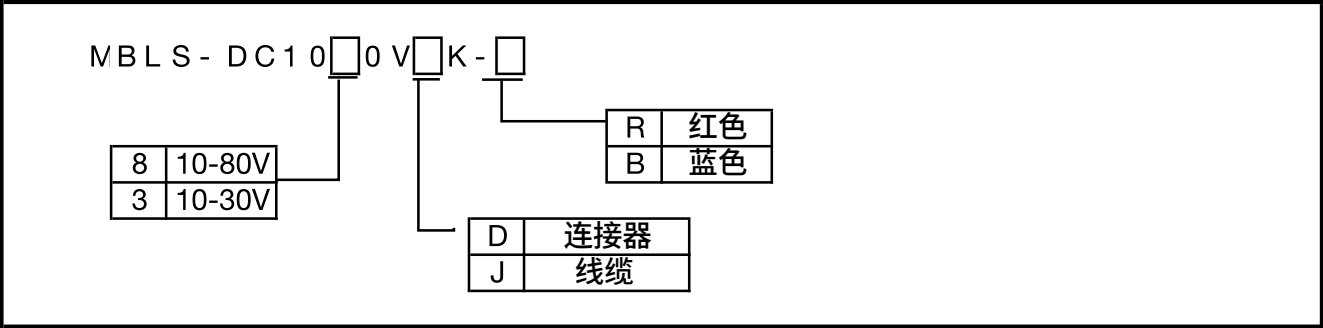


3. 外形尺寸 (单位: mm)

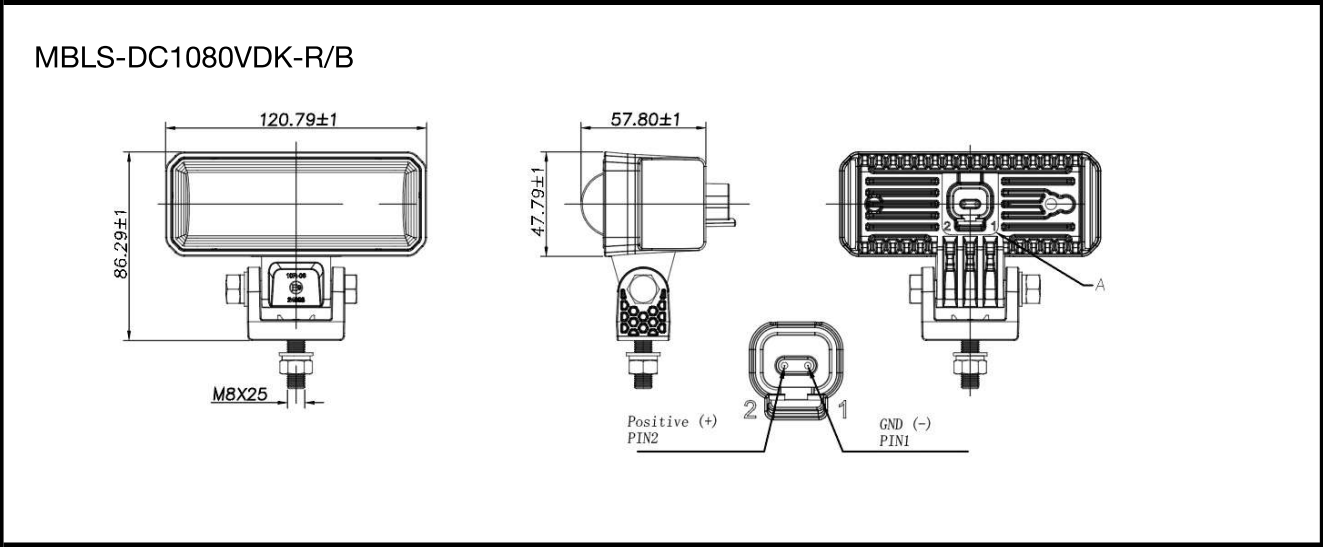


Drawing No.	Rev.	Page
MBLS - A61	A	2/3

MBLS-DC1030VJK-R/B

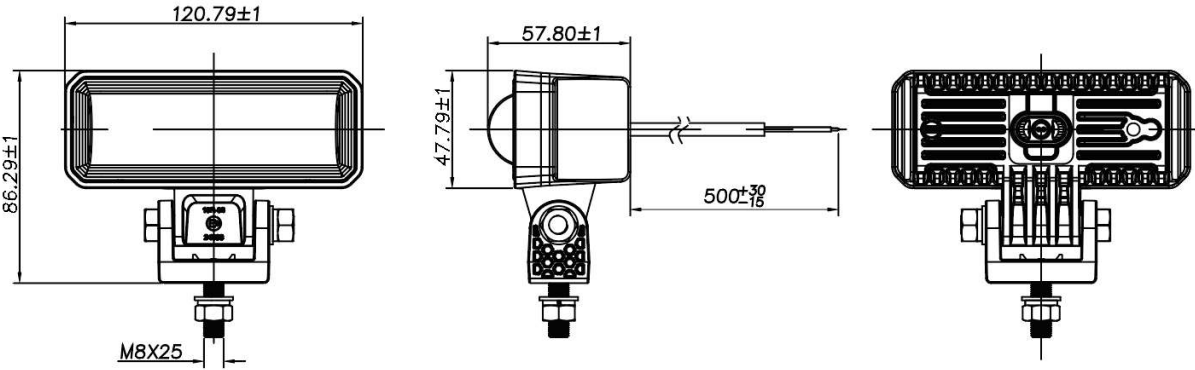

4. 接线图


MBLS-DC1080VDK-R/B

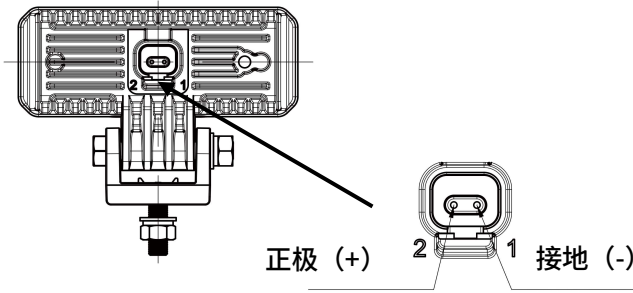

建议外接保险丝	
R: 2.2A	B: 2.8A



连接器型号: DT04-2P
配对型号: DT06-2S

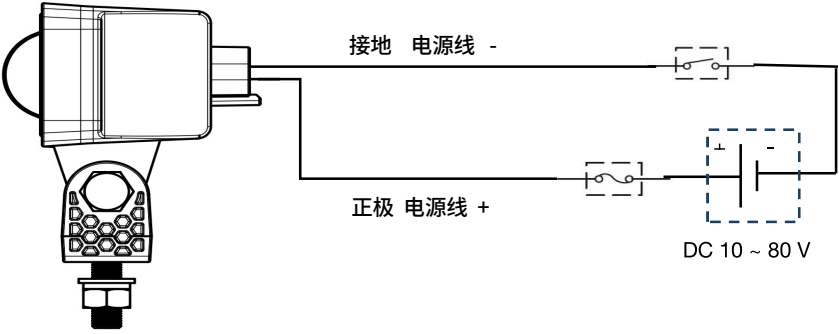


Drawing No.	Rev.	Page
MBLS - A61	A	3/3

MBLS-DC1030VJK-R/B

建议外接保险丝
R: 2.2A B: 2.6A

符号

继电器



保险丝

