


产品规格书


1. 规格

型号		MBL-DC1030V□K-□		MBL-DC1080V□K-□	
额定电压		DC 10-30V		DC 10-80V	
工作电压范围		额定电压 ±5%			
额定电流	最大值	13.5V	28V	13.5V	80V
		R: 1.5A B: 1.9A	R: 0.72A B: 0.9A	R: 1.6A B: 1.9A	R: 0.26A B: 0.32A
额定功率	最大值	13.5V	28V	13.5V	80V
		R: 20.25W B: 25.65W	R: 20.16W B: 25.2W	R: 21.6W B: 25.65W	R: 20.8W B: 25.6W
亮灯颜色		R: 红色 B: 蓝色			
工作环境温度		-40℃ ~ +65℃			
接线方式		D: DT04-2P			
		J: 500 mm 线缆			
安装方式		支架安装			
防护等级		IP67/IP69K			
符合标准		ECE R10/RoHS 10/Reach			

2. 型号

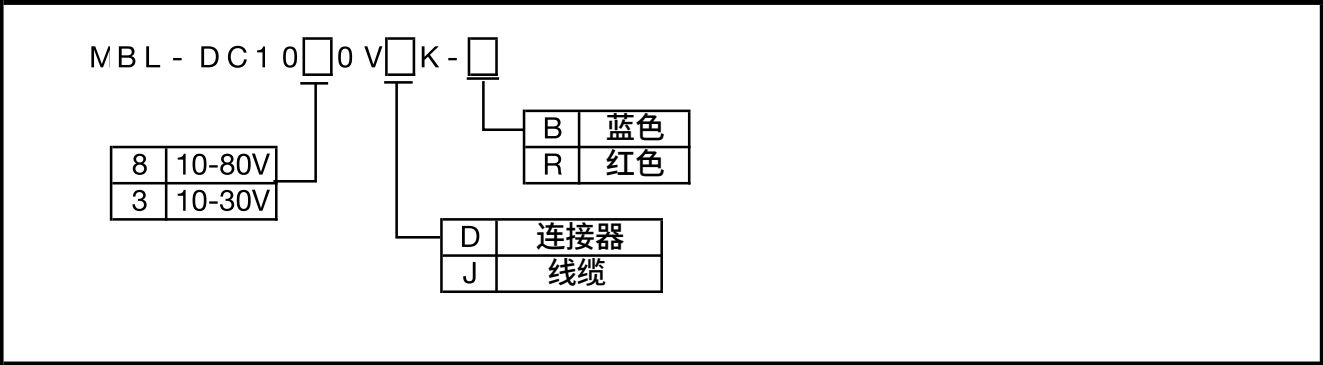


3. 外形尺寸 (单位: mm)

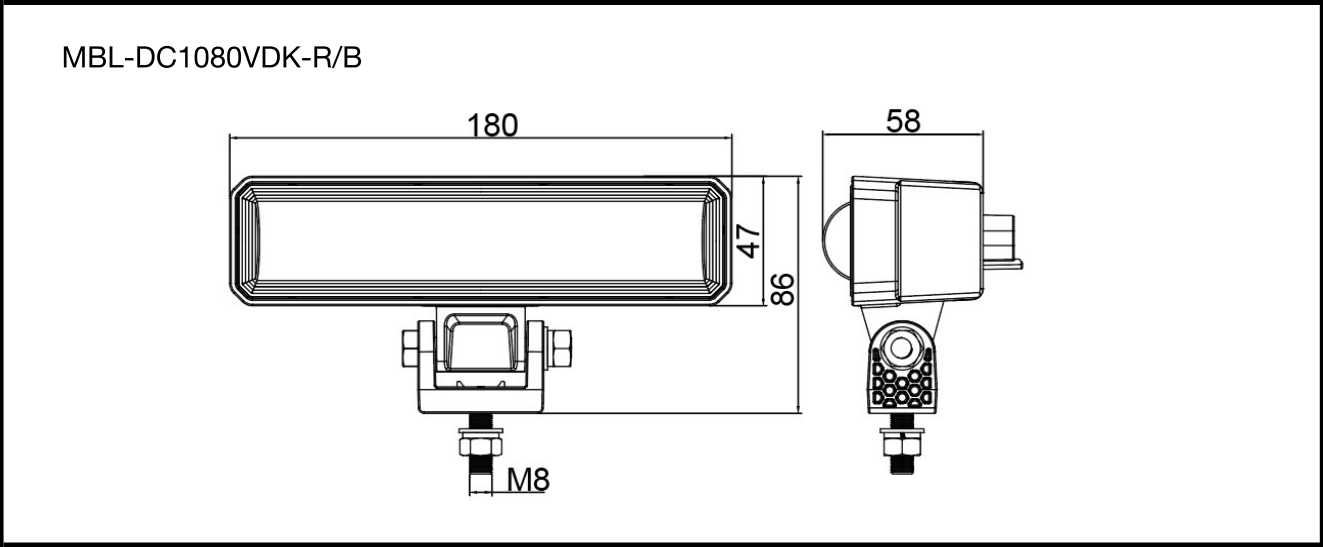

Drawing No.	Rev.	Page
MBL-A61	A	2/3



MBL-DC1030VJK-R/B

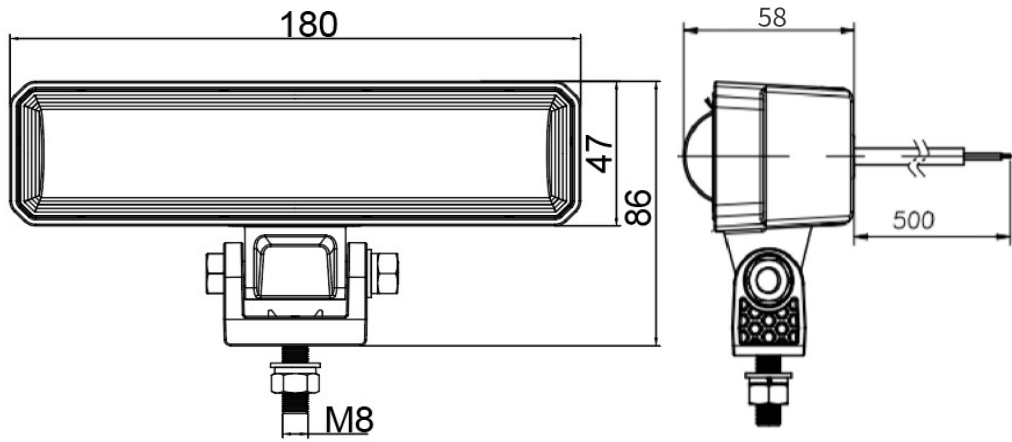


4. 接线图

MBL-DC1080VDK-R/B

建议外接保险丝	
B: 5A	R: 5A

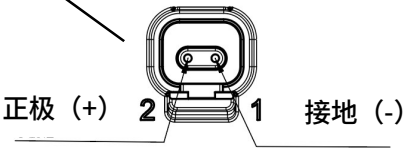

连接器型号: DT04-2P
配对型号: DT06-2S

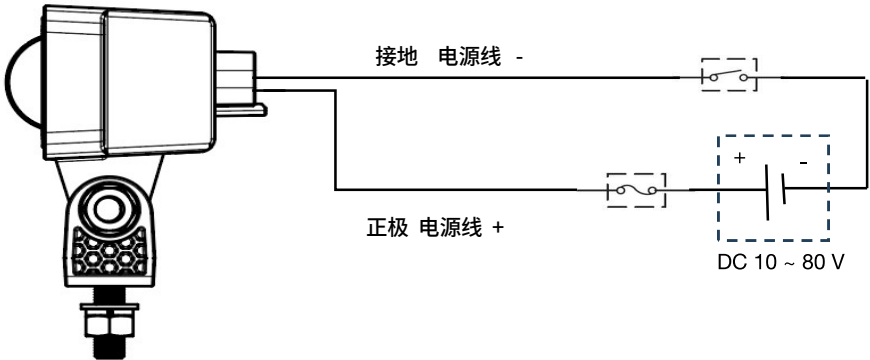

Drawing No.	Rev.	Page
MBL-A61	A	3/3

MBL-DC1030VJK-R/B

建议外接保险丝	
R: 4A	B: 4A

符号	
继电器	
保险丝	

